


Yealink IP Telefon Yazılım Güncelleme


Telefonunuzu güncellerken aşağıdaki adımları takip ediniz.

1. Öncelikle <http://support.yealink.com/> linkini ziyaret ediniz. Burada "Download" sekmesine tıklayınız.

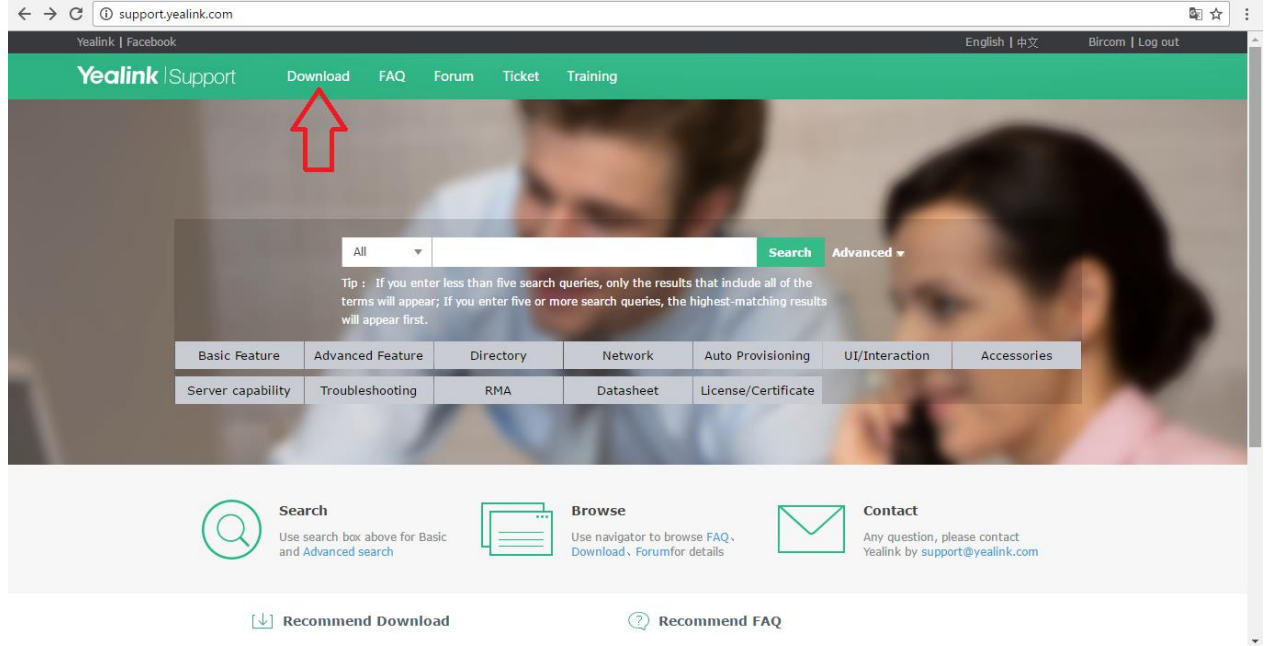


The screenshot shows the Yealink Support website. The navigation menu includes 'Download', 'FAQ', 'Forum', 'Ticket', and 'Training'. A red arrow points to the 'Download' link. Below the navigation bar is a search bar with a dropdown menu set to 'All'. A tip below the search bar reads: 'Tip : If you enter less than five search queries, only the results that include all of the terms will appear; If you enter five or more search queries, the highest-matching results will appear first.' Below the search bar is a table with categories: Basic Feature, Advanced Feature, Directory, Network, Auto Provisioning, UI/Interaction, Accessories, Server capability, Troubleshooting, RMA, Datasheet, License/Certificate. At the bottom of the page, there are three sections: 'Search' (with a magnifying glass icon), 'Browse' (with a list icon), and 'Contact' (with an envelope icon). Below these are two buttons: 'Recommend Download' and 'Recommend FAQ'.

2. Burada açılan sayfadan kendi ürününüzün modelini tıklayınız.

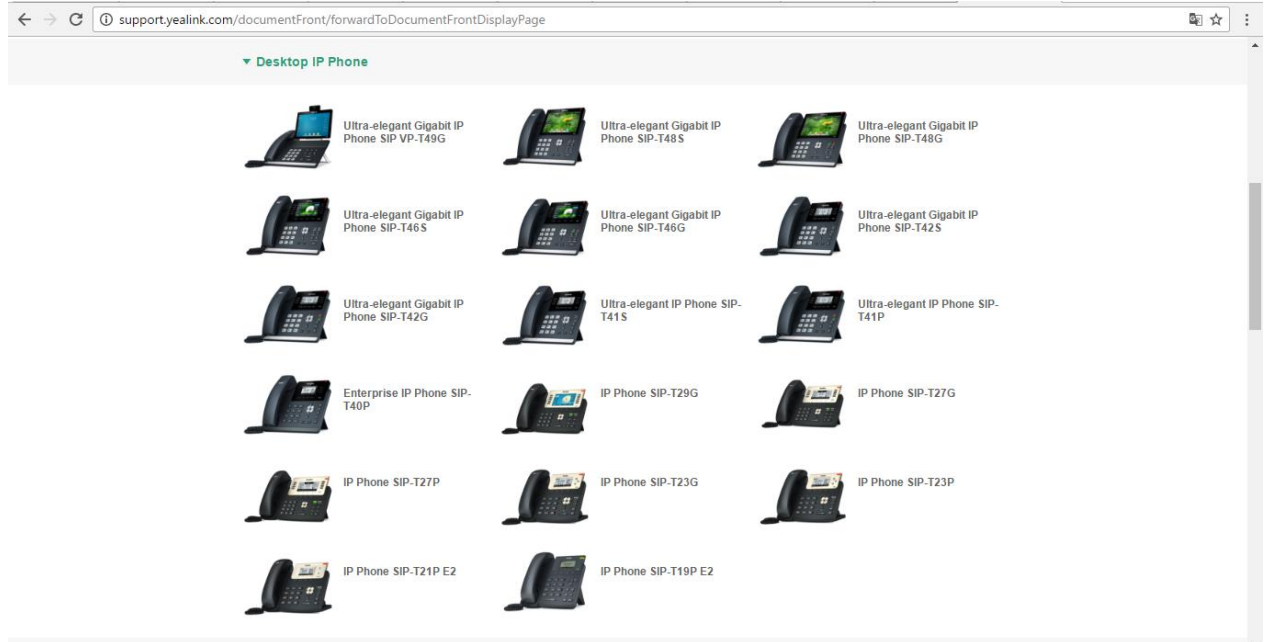


The screenshot shows a grid of desktop IP phone models under the heading 'Desktop IP Phone'. The models are arranged in a 6x3 grid. Each model is represented by a small image of the phone and its name. The models are: Ultra-elegant Gigabit IP Phone SIP-VP-T49G, Ultra-elegant Gigabit IP Phone SIP-T48S, Ultra-elegant Gigabit IP Phone SIP-T48G, Ultra-elegant Gigabit IP Phone SIP-T46S, Ultra-elegant Gigabit IP Phone SIP-T46G, Ultra-elegant Gigabit IP Phone SIP-T42S, Ultra-elegant Gigabit IP Phone SIP-T42G, Ultra-elegant IP Phone SIP-T41S, Ultra-elegant IP Phone SIP-T41P, Enterprise IP Phone SIP-T40P, IP Phone SIP-T29G, IP Phone SIP-T27G, IP Phone SIP-T27P, IP Phone SIP-T23G, IP Phone SIP-T23P, IP Phone SIP-T21P E2, and IP Phone SIP-T19P E2.


- Ardından gelen sayfadan “Firmware & Release Note” ‘lar altında en yeni firmware’i tıklayarak indiriniz. Bu indirdiğiniz “.rom” uzantılı dosyayı ilerleyen adımlarda kullanacaksınız.

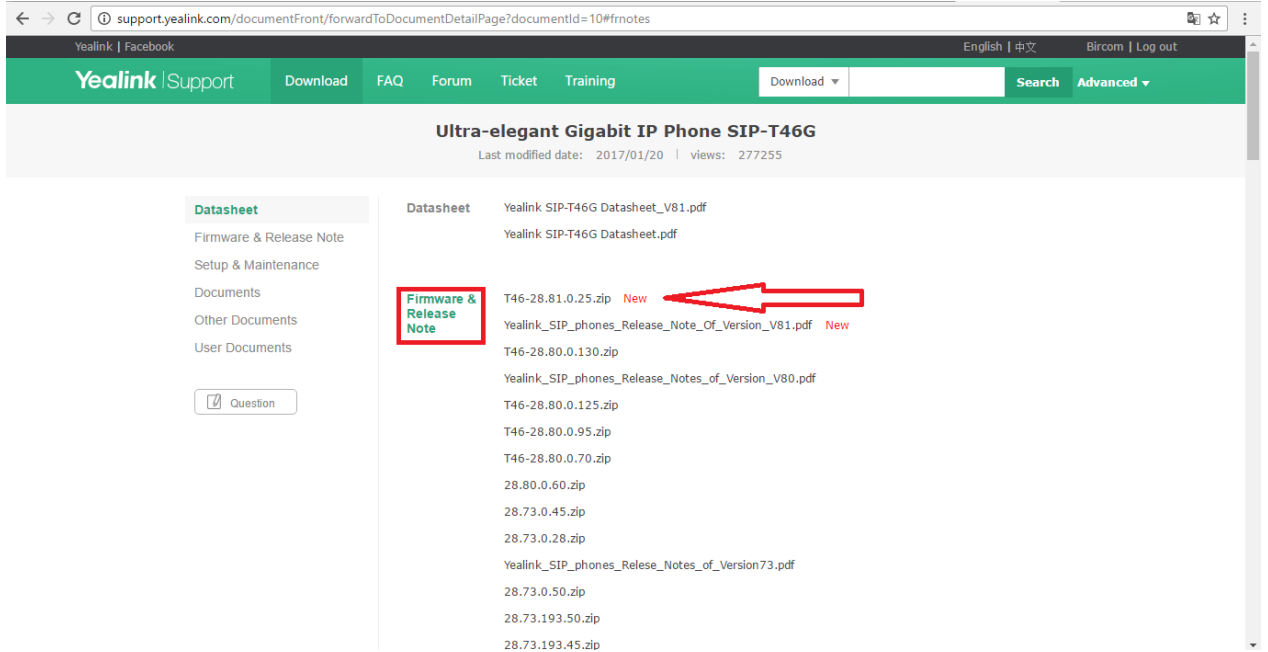

- Telefonunuzun üzerindeki “ok” tuşuna basınız. Ekranda gördüğünüz “Ipv4: ---.---.---.---” satırındaki IP adres bilgisini not alınız. (Ör: Ipv4: 192.168.1.105)
- Herhangi bir internet tarayıcısını açınız ve kaydettiğiniz IP adresini URL’ye yazınız. Ardından enter tuşuna basınız.

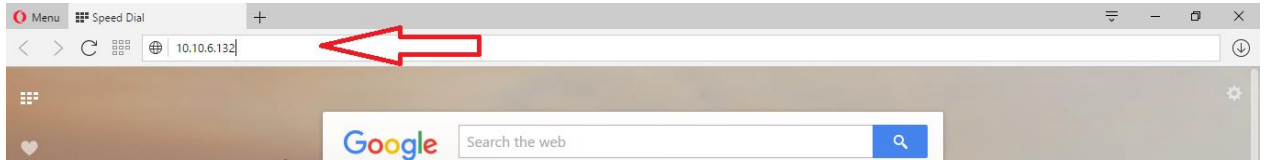

6. Açılan giriş sayfasında Username: "admin" , Password: "admin" olarak yazınız ve ardından "Confirm" butonuna tıklayınız.

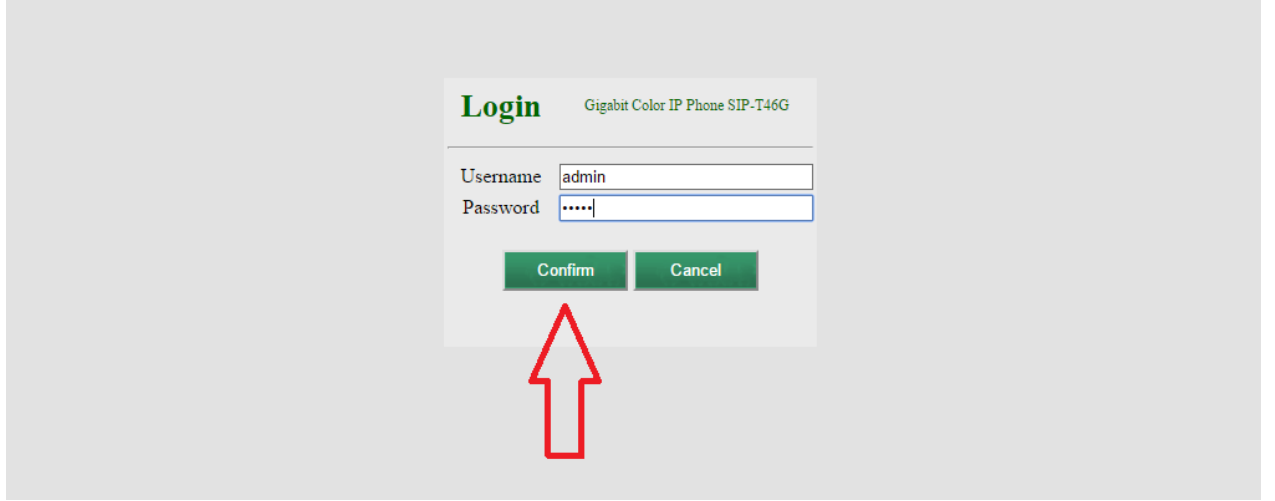


Login Gigabit Color IP Phone SIP-T46G

Username: admin
Password:

Confirm Cancel

7. Açılan Pencerede üst kısımdan "Settings" sekmesine tıklayınız.

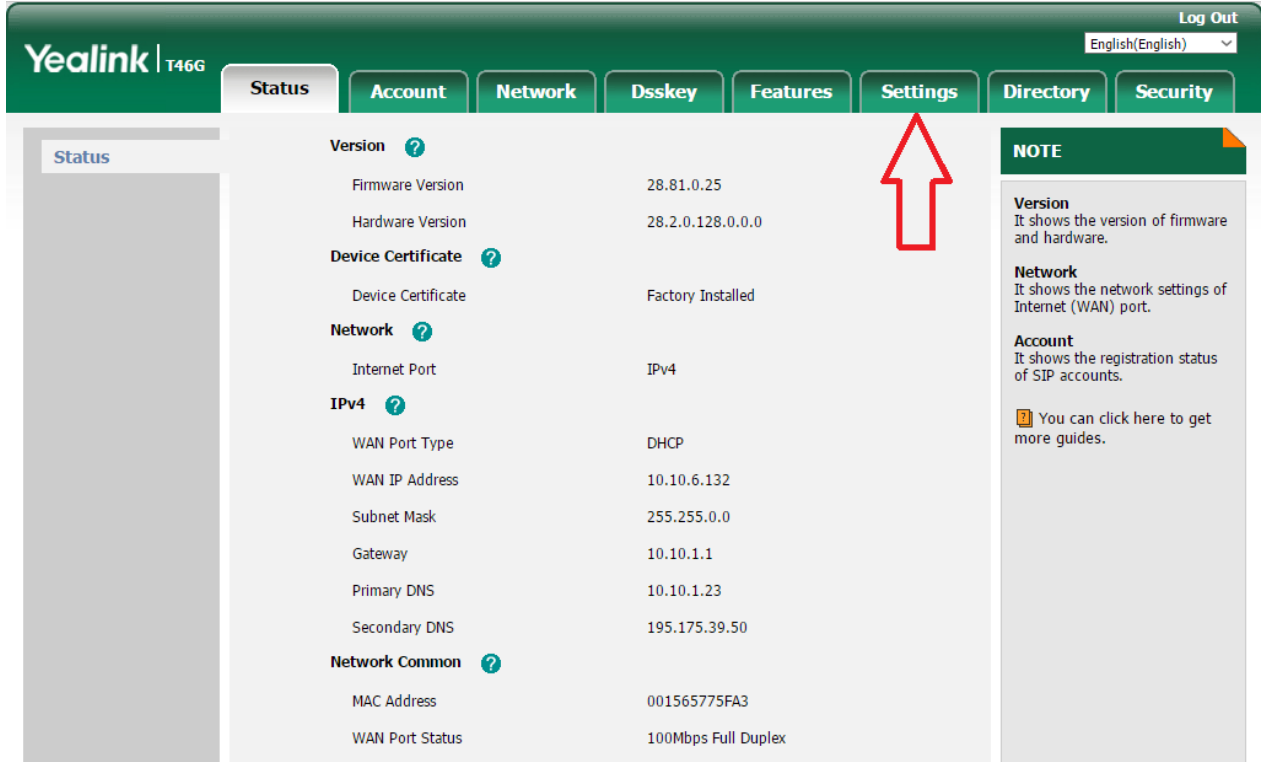

Yealink | T46G Log Out English(English)

Status Account Network Dsskey Features **Settings** Directory Security

Status

Version ?	
Firmware Version	28.81.0.25
Hardware Version	28.2.0.128.0.0.0
Device Certificate ?	
Device Certificate	Factory Installed
Network ?	
Internet Port	IPv4
IPv4 ?	
WAN Port Type	DHCP
WAN IP Address	10.10.6.132
Subnet Mask	255.255.0.0
Gateway	10.10.1.1
Primary DNS	10.10.1.23
Secondary DNS	195.175.39.50
Network Common ?	
MAC Address	001565775FA3
WAN Port Status	100Mbps Full Duplex

NOTE


Version
It shows the version of firmware and hardware.

Network
It shows the network settings of Internet (WAN) port.

Account
It shows the registration status of SIP accounts.


You can click here to get more guides.

8. Settings sekmesinin altında, sayfanın sol kısmında “Upgrade” altsekmesine tıklayınız.

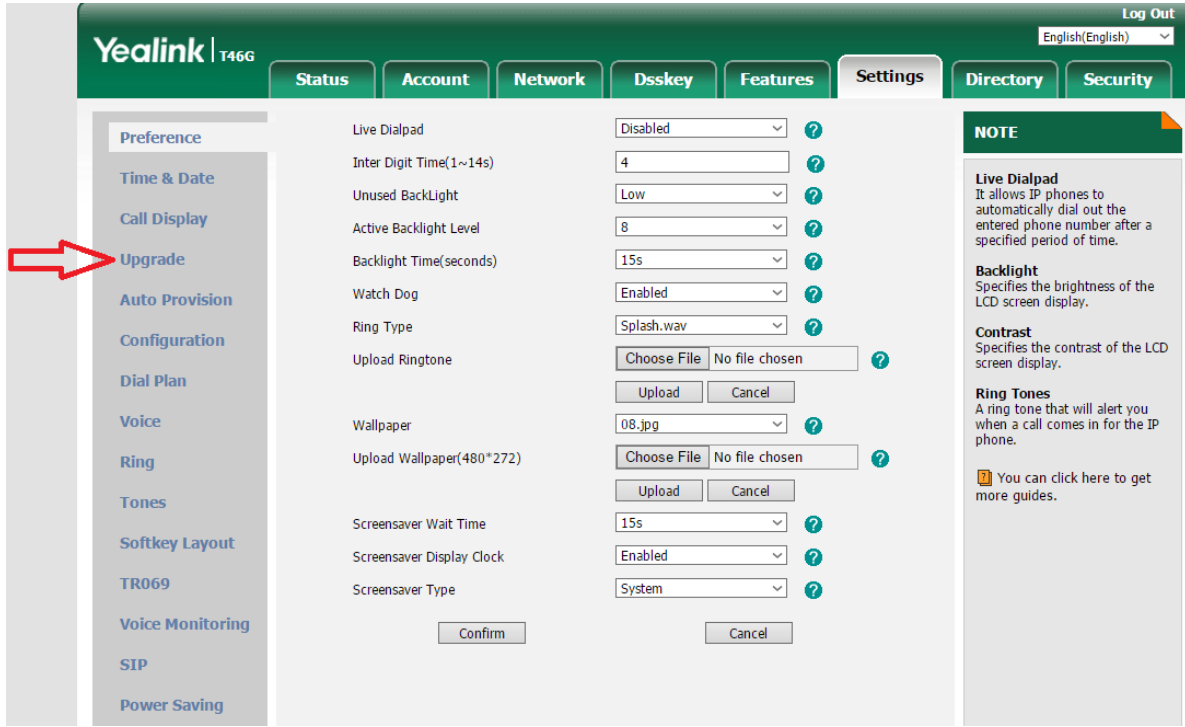

The screenshot shows the Yealink T46G Settings page. The left sidebar has a red arrow pointing to the 'Upgrade' option. The main content area displays settings for Live Dialpad (Disabled), Inter Digit Time (4), Unused Backlight (Low), Active Backlight Level (8), Backlight Time (15s), Watch Dog (Enabled), Ring Type (Splash.wav), Upload Ringtone (Choose File), Wallpaper (08.jpg), Upload Wallpaper (480*272) (Choose File), Screensaver Wait Time (15s), Screensaver Display Clock (Enabled), and Screensaver Type (System). A 'NOTE' section on the right explains Live Dialpad, Backlight, Contrast, and Ring Tones.

9. Karşınıza gelen Upgrade sayfasında “Choose File” butonuna tıklayarak, daha önceden indirdiğiniz “.rom” uzantılı dosyayı seçiniz. Ardından “upgrade” butonuna tıklayınız.

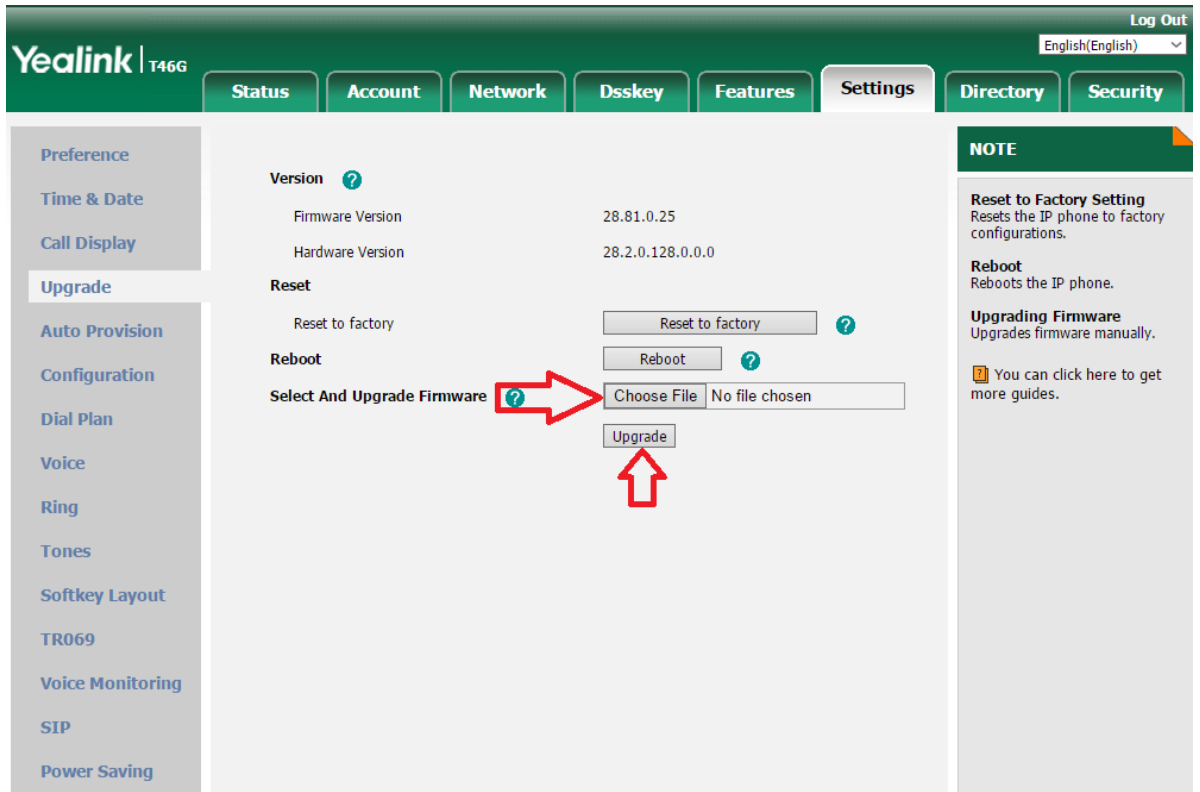

The screenshot shows the Yealink T46G Upgrade page. The left sidebar has a red arrow pointing to the 'Upgrade' option. The main content area displays Version information (Firmware Version: 28.81.0.25, Hardware Version: 28.2.0.128.0.0.0) and options for Reset, Reboot, and Select And Upgrade Firmware. The 'Choose File' button is highlighted with a red arrow, and the 'Upgrade' button is also highlighted with a red arrow.